
Low-floor tram



Modular concept



TEHNICAL SPECIFICATIONS	
Floor height	350 mm
Entrance height	300 mm
Capacity	up to 300 passengers (4 pass / m²)
Power supply	DC 600 V, DC 750 V
Track gauge	1000 mm, 1435 mm, 1524 mm
Maximum speed	70 km/h

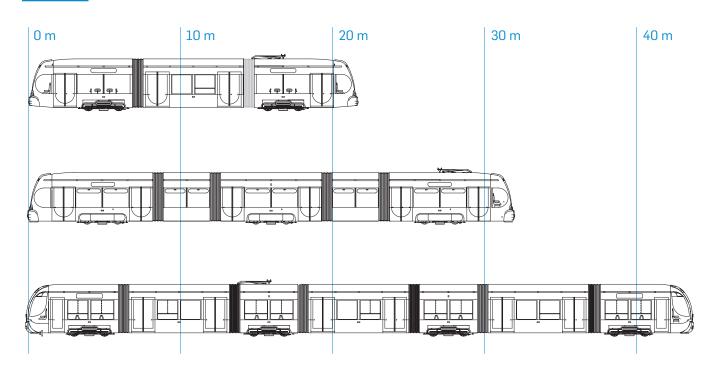



Key features

- 100% low-floor articulated tram
- Walk-through passenger area without steps
- Tailor made interior and exterior design
- Passenger and driver area with A/C
- Suitable for various infrastructure conditions
- High reliability with reduced LCC














- Air-conditioned passenger area with ergonomic seats and panoramic glazing
- Wide entrance doors with platform-level flooring for easy boarding
- Multi-purpose space for wheelchair users
- Designated space for bicycles
- Passenger information system (PIS) with visual and audio announcements
- Video-surveillance of the whole passenger area
- Ergonomically designed and air-conditioned drivers' cab
- High reliability with low operational and maintenance costs











KONČAR **ELECTRIC VEHICLES**

KONČAR - Electric Vehicles Inc. for manufacturing Ul. Ante Babaje 1, 10090 Zagreb, Croatia phone: +385 1 3496 933 e-mail: info@koncar-kev.hr

www.koncar.hr/en/koncar-electric-vehicles



